



## On the Concept of Electrode to Discharge Phenomena in Surface Roughness With Reference Strongly Electronegative Gases

McAllister, Iain Wilson

*Published in:*  
IEEE Transactions on Electrical Insulation

*Link to article, DOI:*  
[10.1109/TEI.1986.348973](https://doi.org/10.1109/TEI.1986.348973)

*Publication date:*  
1986

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*  
McAllister, I. W. (1986). On the Concept of Electrode to Discharge Phenomena in Surface Roughness With Reference Strongly Electronegative Gases. *IEEE Transactions on Electrical Insulation*, *EI-21*(4), 659-662.  
<https://doi.org/10.1109/TEI.1986.348973>

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

## COMMUNICATION

ON THE CONCEPT OF ELECTRODE SURFACE ROUGHNESS WITH REFERENCE  
TO DISCHARGE PHENOMENA IN STRONGLY ELECTRONEGATIVE GASES

I.W. McAllister

Physics Laboratory II  
The Technical University of Denmark  
Lyngby, Denmark

## ABSTRACT

The use of geometrically well-defined protrusions in studies of the effects of electrode surface roughness upon the insulation strength of strongly electronegative gases is discussed. It is argued that, with respect to the roughness associated with production processes, the dimensions of artificial protrusions are inevitably too large. Consequently, results from investigations using such protrusions are not necessarily applicable to practical conditions.

## INTRODUCTION

When compressed  $\text{SF}_6$  was first introduced as an electrical insulant in HV power equipment, it was discovered that the insulation strength of the system was less than that predicted by theory. An explanation for this apparent reduction in the dielectric strength of compressed  $\text{SF}_6$  can be given by considering the perturbations of the macroscopic electric field produced either by the microscopic roughness of electrode surface or by conducting particles. That such perturbations of the electric field should play a major role in the dielectric strength of  $\text{SF}_6$  is due to the effective coefficient of ionization  $\alpha$  being a strongly varying function of the electric field strength  $E$ , particularly for  $E \approx E_{lim}$ , where  $E_{lim}$  is the value for which  $\alpha=0$ . This sensitivity of  $\text{SF}_6$  to electrode surface roughness has provoked considerable interest in the dielectric behavior of other strongly electronegative gases and gas mixtures with a view to finding a gas with superior insulating behavior [1-3].

Experimental investigations into the effect of electrode surface roughness upon the dielectric strength of strongly electronegative gases have adopted two different approaches, viz. (a) the use of geometrically well-defined artificial protrusions mounted on plane electrodes and (b) the use of an electrode having a surface finish comparable with that related to production processes, but which in comparison to (a) is ill-defined.

The latter approach represents, with respect to insulation strength, the normal operating situation and thus results obtained from any investigation into the dielectric behavior of a gas are directly applicable to a practical situation. Owing to the complex structure of the electrode surfaces utilized, we are unable to derive any information about the associated field perturbations, and hence a deeper analysis of the results cannot be undertaken. The former approach provides a well-defined perturbation of the macroscopic electric field, and thus lends itself to an analysis of, for example, onset conditions.

In the present contribution, such an analysis is used to determine the relevant dimensions of artificial protrusions. These dimensions are found to be comparable with those of the roughness associated with production processes. To-date however, the dimensions of the artificial protrusions employed have all been much greater. This suggests an inability to obtain protrusions of the relevant dimensions. Consequently, as available artificial protrusions are unrepresentative of practical conditions, results from investigations using such protrusions are not necessarily applicable to practical conditions.

## SIMULATION OF A ROUGH SURFACE

Several forms of artificial protrusion have been used

in roughness investigations, e.g. a sphere [4], a hemisphere [5], or a circular wire [6]. For the purposes of the present discussion, we will examine the use of the last named, see Fig. 1.

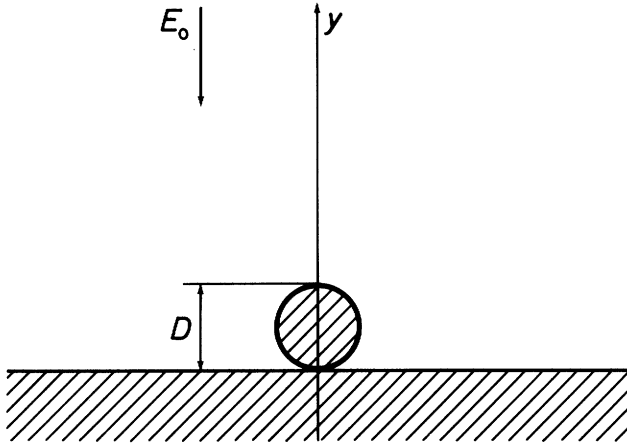


Fig. 1: Surface roughness model - circular wire.

In analyzing this roughness model, we assume that the plane electrode is of infinite extent and that the macroscopic electric field may be represented by a uniform field  $E_0$ . The solution of the Laplace equation for this electrode geometry can be obtained using conformal mapping. With this solution, the electric field distribution along the field line associated with the maximum field strength, i.e. the  $y$ -axis, see Fig. 1, can be shown to be given by

$$E(y) = \frac{(\pi D/2y)^2 E_0}{\sin^2(\pi D/2y)} \quad (1)$$

Hence for this protrusion model, the field enhancement factor  $m$  is  $m = E_{max}/E_0 = \pi^2/4 = 2.4674$ .

On the basis of the streamer criterion and assuming that  $\bar{\alpha}$  is, as a first approximation, a linear function of electric field strength  $E$  and gas pressure  $p$ , it is possible to derive a general expression for the discharge onset condition in a strongly electronegative gas [7]. This condition can be expressed, with reference to the macroscopic field and the present coordinate system, as

$$E_0/p = \frac{(M/p) + y_0 - D}{\int_D^{y_0} f(y) dy} (E/p)_{lim} \quad (2)$$

where  $M$  is the figure of merit for a strongly electronegative gas, and  $D$  is the wire diameter. The distance  $y_0$  is found from

$$E(y_0) = E_{lim} \quad (3)$$

and  $f(y)$  is obtained from (1), i.e.

$$f(y) = E(y)/E_0 \quad (4)$$

The concept of  $M$  is fully described in [7].

To quantify the reduction in  $E_0$  due to the presence of the protrusion, a surface roughness factor  $\xi$  is defined such that

$$E_0/p = \xi(E/p)_{lim}, \quad \text{with } 0 < \xi \leq 1. \quad (5)$$

Consequently upon utilizing Eqs. (2 to 5), the onset condition can be expressed in terms of the protrusion diameter  $D$  as

$$pD = \frac{M}{1 + \pi[\xi \cot(\pi D/2y_0) - (2y_0/\pi D)]/2} \quad (6)$$

As with other protrusion models of the present type for which the macroscopic electrode is assumed to be a plane and  $E_0$  is of infinite extent [8], a critical value of  $pD$  exists below which the surface roughness has no effect. For example, as  $y_0 \rightarrow \infty$ , we find  $\xi \rightarrow 1$  and  $pD \rightarrow (pD)_{crit} = M$ .

Since  $\text{SF}_6$  is the reference gas against which other strongly electronegative gases are assessed, the calculations were undertaken only for this gas. The variation of  $\xi$  with  $p$  is shown in Fig. 2 for various values of  $D$ . For  $\text{SF}_6$  we have  $M = 0.004 \text{ MPa mm}$  [9]. In the present study, the non-ideal gas behavior of  $\text{SF}_6$  [10] was neglected. It should be noted that the actual value of  $(E/p)_{lim}$  is not required in the calculations.

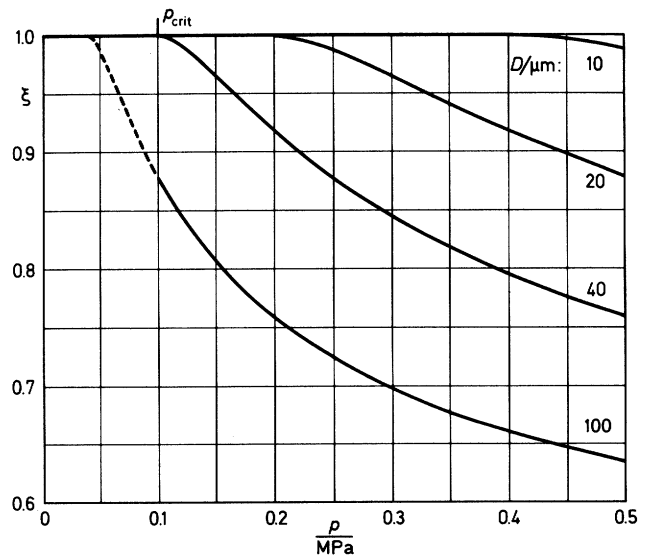


Fig. 2: Surface roughness factor  $\xi$  for  $\text{SF}_6$ .

## DISCUSSION AND CONCLUSION

In practical compressed SF<sub>6</sub> insulated systems, the effect of electrode surface roughness is to produce a reduction in the insulation strength of the system from that predicted on the basis of the idealized macroscopic geometry. This effect is readily observed at high gas pressures, i.e.  $p > 0.1$  MPa. In the present paper, we will take the lower pressure limit for the onset of the reduction in the insulation strength to be 0.1 MPa, i.e.  $p_{crit} = 0.1$  MPa. This choice enables a maximum tolerable dimension for the protrusion under discussion to be determined.

From Fig. 2 it is clear that investigations into the influence of surface roughness upon discharge phenomena in SF<sub>6</sub> should employ wires with diameters less than 40  $\mu\text{m}$ ;  $\xi < 1$  at  $p > 0.1$  MPa. It must be emphasized that this particular limit of 40  $\mu\text{m}$  is a specific feature of the roughness model under discussion. However, because this model displays a low  $m$ -value, this upper limit is not unrealistic.

Most production processes are associated with surface roughness dimensions of  $< 25 \mu\text{m}$ , see Fig. 3 [11]. Hence it would seem desirable to employ artificial protrusions of similar dimensions. To-date however, the dimensions of the different protrusions have all been  $> 100 \mu\text{m}$  [4-6], suggesting that it is not readily possible to obtain single, artificial protrusions of the appropriate dimensions, see Fig. 2 for the influence of  $D = 100 \mu\text{m}$ . That it is necessary to consider protrusions of smaller dimensions is clear from a comparison of the results of Biasiutti et al. [6] with those of Vibholm and Crichton [12]. In this latter study, the authors found that a

considerable degree of corona stabilization could develop when utilizing electrodes having  $R_a < 35 \mu\text{m}$ . In contrast, Biasiutti et al. recorded no pre-breakdown phenomenon using wires of 200 and 400  $\mu\text{m}$  diameter.

Consequently, although artificial protrusions having well-defined geometrical shapes can be used to check the validity of onset calculations, the difficulty in obtaining artificial protrusions of dimensions comparable to the roughness associated with production processes restricts their usefulness with respect to investigations of discharge development under practical conditions. Investigations into the sensitivity of strongly electronegative gases to electrode surface roughness should be undertaken using electrodes having a surface roughness of relevant dimensions. For example,  $< 25 \mu\text{m}$  if a pure surface effect is to be examined, whereas larger dimensions would be appropriate if conducting particles are considered the main area of interest.

## ACKNOWLEDGEMENT

The author wishes to thank the American Society of Mechanical Engineers for permission to reproduce Fig. B1 from ANSI B46.1-1978 "Surface Texture (Surface Roughness, Waviness and Lay)".

## REFERENCES

- [1] L.G. Christophorou (ed.), *Gaseous Dielectrics II*, Pergamon Press NY 1980.
- [2] L.G. Christophorou (ed.), *Gaseous Dielectrics III*, Pergamon Press NY 1982.
- [3] L.G. Christophorou and M. Pace (eds.), *Gaseous Dielectrics IV*, Pergamon Press NY 1984.
- [4] C.M. Cooke, "Ionization, electrode surfaces and discharges in SF<sub>6</sub> at extra-high-voltages," IEEE Trans. Power Appar. & Syst. Vol. PAS-94, pp. 1518-1523, 1975.
- [5] O. Farish, O.E. Ibrahim and B.H. Crichton, "Effect of electrode surface roughness on breakdown in nitrogen/SF<sub>6</sub> mixtures," Proc. IEE Vol. 123, pp. 1047-1050, 1976.
- [6] G. Biasiutti, C. Ammann, E. Engler and W. Zaengl, "Electric strength of hexafluoropropylene (C<sub>3</sub>F<sub>6</sub>) and its mixtures with SF<sub>6</sub> at practical pressures," Proc. Fourth International Symposium on High Voltage Engineering, Athens 1983, Vol. 1, Paper No. 33.02, 1983.
- [7] A. Pedersen, I.W. McAllister, G.C. Crichton and S. Vibholm, "Formulation of the streamer breakdown criterion and its application to strongly electronegative gases and gas mixtures," Archiv für Elektrotechnik Vol. 67, pp. 395-402, 1984.
- [8] I.W. McAllister, "The influence of electrode macroscopic curvature upon surface roughness effects in compressed SF<sub>6</sub>," Archiv für Elektrotechnik Vol. 62, pp. 43-49, 1980.

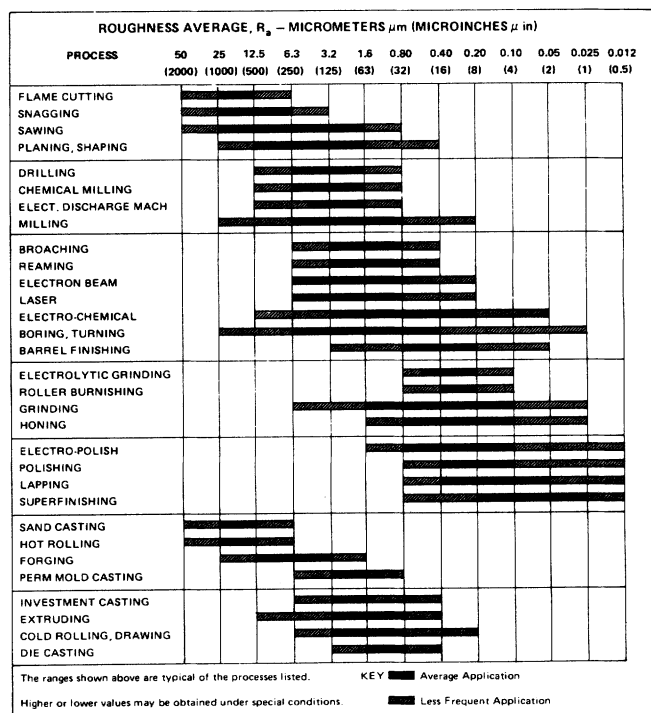


Fig. 3: Surface roughness dimensions associated with different production processes [11].

- [9] J. Berril, J.M. Christensen and A. Pedersen, "Measurement of the figure of merit related to the effect of electrode surface defects on the breakdown for strongly electronegative gases or gas mixtures," Seventh International Conference on Gas Discharges and Their Applications, London 1982, pp. 266-268, 1982.
- [10] J. Mollerup, "Measurement of the volumetric properties of sulfur hexafluoride from 260 to 340 K at pressures to 2.5 MPa," J. Chem. & Engng. Data Vol. 30, pp. 21-23, 1985.
- [11] American National Standard, *Surface Textures (Surface Roughness, Waviness and Lay)*, ANSI B46.1-1978, The American Society of Mechanical Engineers NY 1978.
- [12] S. Vibholm and G.C. Crichton, "On the optimization of pressure and surface roughness parameters in compressed SF<sub>6</sub>," Seventh International Conference on Gas Discharges and Their Applications, London 1982, pp. 259-261, 1982.

*Manuscript was received on 7 January 1986, in revised form 19 April 1986.*